




# LÍNEA CONTINUA EMBUTIDA

TECNOLOGÍA LED

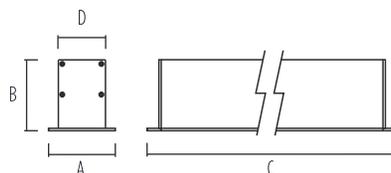

LÍNEA E16 - E32

NOMBRE	POT.	LÁMP.	TIPO	LÚMENES	°K	IRC	FP	MEDIDAS			CALADO	MODELO
LÍNEA E16	16W	LED T5	INDIVIDUAL	1.280	4.000 / 6.500	>80	>0.5	1200	68	75	1200	35149
	16W	LED T5	CENTRAL	1.280		>80	>0.5	1200	68	75	1200	35150
	16W	LED T5	LAT. CONEX.	1.280		>80	>0.5	1200	68	75	1200	35151
	16W	LED T5	LAT. OPUESTO	1.280		>80	>0.5	1200	68	75	1200	35157
LÍNEA E32	32W	LED T5	INDIVIDUAL	2.560	4.000 / 6.500	>80	>0.5	1200	68	75	1200	35152
	32W	LED T5	CENTRAL	2.560		>80	>0.5	1200	68	75	1200	35154
	32W	LED T5	LAT. CONEX.	2.560		>80	>0.5	1200	68	75	1200	35153
	32W	LED T5	LAT. OPUESTO	2.560		>80	>0.5	1200	68	75	1200	35158

Sistema de iluminación modular embutido con su cuerpo fabricado de aluminio extruido y difusor de policarbonato opal. Con accesorios en acero inoxidable y aluminio. Provisto con LED's con un rendimiento mayor a 90lm/W. Vida útil: 20.000 Hs.

COLORES:

